



Beyond Strong



HOSHIZAKI





Hoshizaki Corporation (Hoshizaki Electric Co., Ltd) was established in February, 1947 in Nagoya, Japan by Mr. Shigetoshi Sakamoto. Over the years, Hoshizaki Corporation has manufactured and sold a variety of products to include stoves, fridges, vending machines, water purifiers, servers and dispensers, ice-makers and refrigerated showcases.

For more than 50 years, Hoshizaki Corporation continues to innovate and specializing in Refrigerator and Ice-Machines products, becoming the world's largest manufacture and marketer of food service. Through the vision of best customer satisfaction followed by greatest quality product and best service, Hoshizaki is now proudly recognized as the No. 1 Company in Japan.



ICE MACHINES	4
Crescent Self Contained	5
Crescent Modular	6
Cube Ice Maker Self Contained	7
Cube Ice Maker Modular	9
Special Ice	11
Flake & Nugget Self Contained	12
Flake & Nugget Modular	13
Ice Dispenser	15
Storage Bin	16
CHILLERS & FREEZERS	17
Upright Chiller	18
Upright Freezer	19
Glass door Upright Chiller	20
Upright Combo Depth	21
Undercounter Chiller Depth	22
Undercounter Freezer Depth	23
Swing Glass Undercounter Chiller	24
Lower Height Drawer Chiller	25
Slide Glass Undercounter Chiller	25
DISHWASHER	27
SUSHI SHOWCASE	29




ICE MACHINES



Together with the vision to prioritize the customer satisfaction, Hoshizaki has invented the original technology for the Basic Designs of Evaporators.

As the result, each Hoshizaki Ice Machine products use the Stainless Steel Evaporator which produce the best quality ice that is already proven melt very slowly (up to 24 hours time) compared to any other ice produced by different ice machines brand.





CRESCENT



KM-40C




**KM-60C
KM-80C**



KM-130C

MODEL NAME	KM-40C	KM-60C	KM-80C	KM-130C	
ICE DIMENSION (MM)	W:28.5 D:12.7 H:38.1	W:28.5 D:12.7 H:38.1	W:28.5 D:12.7 H:38.1	W:28.5 D:12.7 H:38.1	
DIMENSION (MM)	W:452 D:610 H:842 (-852)	W:605 D:610 H:842 (-852)	W:605 D:712 H:842 (-852)	W:630 D:719 H:1333 (-1356)	
PACKED DIMENSION (MM)	W:555 D:715:H 996	W:710 D:715 H:996	W:700 D:805 H:996	W:725 D:825 H:1357	
WEIGHT (NETT / GROSS)	40 KG/ 50 KG	46 KG/ 58 KG	51 KG/ 64 KG	69 KG/ 81 KG	
AMPERAGE / STARTING AMPERAGE	1.7 A/ 8.5 A	2.0 A/ 15.5 A	2.6 A/ 12.6 A	4.3 A/ 18.4 A	
ELECTRICAL CONSUMPTION	250W	305 W	405 W	593 W	
REFRIGERANT CHARGE	R134a/ 140g	R134a/ 140g	R134a/ 140g	R1404a/ 220g	
HEAT REJECTION (AT32°C / WT21°C)	620W (553 kcal/h)	740W (636 kcal/h)	890W (765 kcal/h)	1380W	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	43 KG	60 KG	80 KG	130 KG
	(AT21°C/WT15°C)	41 KG	56 KG	74 KG	120 KG
	(AT32°C/WT21°C)	33 KG	45 KG	57 KG	90 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0.18 M3	0.21 M3	0.14 M3	0.15 M3	
ICE PRODUCTION TIME (AT21°C/WT15°C)	FREEZE CYCLE	26 MINUTES	25 MINUTES	23 MINUTES	22 MINUTES
	PER CYCLE	APPROX 0.74 KG/80 PCS	APPROX 1.00 KG/110 PCS	APPROX 1.16 KG/130 PCS	APPROX 1.86 KG/208 PCS
STORAGE CAPACITY	16 KG	23 KG	34 KG	55 KG	

CRESCENT MODULAR



KMD-201AB
KMD-270AB
with HOSHIZAKI
storage bin B-301 SA




KMD-470AJ
with HOSHIZAKI
storage bin B-501 SA



KM-590DJ
with HOSHIZAKI
storage bin B-801 SA

MODEL NAME	KMD-201AB	KMD-270AB	KM-470AJ	KM-590DJ	
ICE DIMENSION (MM)	W:28.5 D:12.7 H:38.1				
DIMENSION (MM)	W:560 D:625 H:610	W:560 D:625 H:610	W:762 D:695 H:825	W:1219 D:695 H:695	
PACKED DIMENSION (MM)	W:668 D:727 H:793	W:668 D:727 H:793	W:855 D:843 H:1000	W:1312 D:843 H:870	
WEIGHT (NETT / GROSS)	57 KG/ 73 KG	57 KG/ 73 KG	122 KG/142 KG	136 KG/ 160 KG	
AMPERAGE / STARTING AMPERAGE	3.0A/ 25A	4.9A/ 24A	11.2 A/ 55A	11.35 A/ 58A	
ELECTRICAL CONSUMPTION	663 W/ 806 W	984 W	1850 W	2080 W	
REFRIGERANT CHARGE	R404a/ 520g	R404a/ 780g	R404a/ 1400 g	R404a/ 1900 g	
HEAT REJECTION (AT32°C / WT21°C)	1410 W (1220 kcal/h)	2435 W (2094 kcal/h)	3690 W	4720 W	
	(AT10°C/ WT10°C)	215 KG	275 KG	495 KG	630 KG
ICE PRODUCTION PER 24H (15MM)	(AT21°C/ WT15°C)	190 KG	255 KG	480 KG	590 KG
	(AT32°C/ WT21°C)	160 KG	221 KG	380 KG	500 KG
WATER CONSUMPTION PER 24 H (AT21°C/WT15°C)	0.48 M ³ 2.6L/ 1 KG ICE	0.55 M ³ 2.2L/ 1 KG ICE	1.02 M ³ 1.3L/ 1 KG ICE	1.15 M ³ 1.3L/ 1 KG ICE	
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME	30.5 MIN	26.8 MIN	24 MIN	28 MIN
	PER CYCLE	3.8 KG/416 PCS	5.3 KG/ 624 PCS	9.7 KG/960 PCS	12.9 KG/1440 PCS

CUBE ICE MAKER SELF CONTAINED



CUBE -



IM-30CA



**IM-45CA
IM-65A**




**IM-100A
IM-130A**

MODEL NAME	IM-30CA	IM-45CA	IM-65A	IM-100A	IM-130A	
ICE DIMENSION (MM)	W 28 X D 28 X H 32					
DIMENSION (MM)	BODY W 398 X D 510 X H 695	BODY W 660 X D 570 X H 695	BODY W 660 X D 570 X H 800	BODY W 660 X D 570 X H 1200	BODY W 660 X D 570 X H 1200	
	LEG HEIGHT D 90 - H 120	LEG HEIGHT D 90 - H 120	LEG HEIGHT D 90 - H 120	LEG HEIGHT D 90 - H 120	LEG HEIGHT D 90 - H 120	
PACKED DIMENSION (MM)	W 490 X D 610 X H 880	W 760 X D 680 X H 880	W 760 X D 680 X H 970	W 760 X D 680 X H 1379	W 760 X D 680 X H 1379	
WEIGHT (NETT / GROSS)	39 KG / 49 KG	52 KG / 65 KG	60 KG / 74 KG	76 KG / 95 KG	79 KG / 98 KG	
AMPERAGE / STARTING AMPERAGE	1,7 A / 9 A	2,0 A / 16 A	2,7 A / 13 A	4,8 A / 18,4 A	2,7 A / 25 A	
ELECTRICAL CONSUMPTION	250 W	310 W	390 W	680 W	630 W	
REFRIGERANT CHARGE	R134a			R404a		
HEAT REJECTION (AT32°C / WT21°C)	520 W (447 kcal/h)	670 W (576 kcal/h)	910 W (576 kcal/h)	1335 W (1150 kcal/h)	1410 W (1213 kcal/h)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/ WT10°C)	30 KG	47 KG	70 KG	112 KG	126 KG
	(AT21°C/ WT15°C)	28 KG	44 KG	62 KG	108 KG	125 KG
	(AT32°C/ WT21°C)	25 KG	38 KG	49 KG	88 KG	100 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0,07 M3	0,12 M3	0,14 M3	0,21M3	0,25M3	
	2,5L/1KG ICE	2,7L/1KG ICE	2,5L/1KG ICE	1,9L/1KG ICE	2,0L/1KG ICE	
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME	21 MIN	23 MIN	26 MIN	28 MIN	23 MIN
	PER CYCLE	0.4 KG / 18 PCS	0.67 KG / 30 PCS	0.94 KG / 42 PCS	1,8 KG / 80 PCS	1,8 KG / 80 PCS
STORAGE CAPACITY	12 KG	15KG	26 KG	52 KG	52 KG	

CUBE ICE MAKER SELF CONTAINED



MODEL NAME	IM-30CNE	IM-45CNE	IM-100CNE	
ICE DIMENSION (MM)	W 28 X D 28 X H 32			
DIMENSION (MM)	BODY W 398 X D 451 X H 695	BODY W 633 X D 511 X H 690	W 1004 X D 600 X H 800	
	LEG HEIGHT D 90 - H 125			
PACKED DIMENSION (MM)	W 505 X D 575 X H 862	W 735 X D 570 X H 864	W 1110 X D 700 X H 875	
WEIGHT (NETT / GROSS)	34 KG / 39 KG	48 KG / 56 KG	77 KG / 88 KG	
AMPERAGE / STARTING AMPERAGE	1,7 A / 10 A	2,4 A / 13 A	4,1 A / 19 A	
ELECTRICAL CONSUMPTION	270 W	320 W	630 W	
REFRIGERANT CHARGE	R134a			
HEAT REJECTION (AT32°C / WT21°C)	430 W (370 kcal/h)	640 W (550 kcal/h)	1180 W (1015 kcal/h)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/ WT10°C)	28 KG	44 KG	95 KG
	(AT21°C/ WT15°C)	24 KG	40 KG	93 KG
	(AT32°C/ WT21°C)	19 KG	32 KG	84 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0,06M3	0,10M3	0,20M3	
	2,5L/1KG	2,5L/1KG ICE	4,5L/1KG ICE	
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME	24 MIN	28 MIN	29 MIN
	PER CYCLE	0,4 KG / 18 PCS	0,67 KG / 30 PCS	1,8 KG / 80 PCS
STORAGE CAPACITY	11,5 KG	15 KG	38 KG	




IM-240DNE
with HOSHIZAKI
storage bin B-801 SA



IM-240DNE + IM-240XNE
with HOSHIZAKI storage
bin B-801 SA

MODEL NAME	IM-240DNE	IM-240XNE
ICE DIMENSION (MM)	W 28 X D 28 X H 32	
DIMENSION (MM)	W 1084 X D 700 X H 500	W 1082 X D 697 X H 485
PACKED DIMENSION (MM)	W 1196 X D 825 X H 640	W 1196 X D 825 X H 640
WEIGHT (NETT / GROSS)	88 KG / 101 KG	84 KG / 98 KG
AMPERAGE / STARTING AMPERAGE	6,6 A / 35 A	
ELECTRICAL CONSUMPTION	1330 W	
REFRIGERANT CHARGE	R404a	
HEAT REJECTION (AT32°C / WT21°C)	2870 W (2470 kcal/h)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C) (AT21°C/WT15°C) (AT32°C/WT21°C)	240 KG 220 KG 190 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0,47 M3 1,7L/ 1KG ICE	0,47 M3 N/A
ICE PRODUCTION (AT21°C/ WT15°C)	FREEZE CYCLE TIME PER CYCLE	19 MIN 3,2KG / 140 PCS
MODE	AVAILABLE ALSO IN WATER COOLED MODELS	

CUBE ICE MAKER MODULAR



CUBE -

IM-240ANE
with HOSHIZAKI
storage bin
B-301 SA



IM-220AA
with HOSHIZAKI
storage bin
B-301 SA

MODEL NAME	IM-240ANE	IM-220AA
ICE DIMENSION (MM)	W 28 X D 28 X H 32	W 28 X D 28 X H 32
DIMENSION (MM)	W 560 X D 700 X H 880	W 560 X D 639 X H 775
PACKED DIMENSION (MM)	W 665 X D 820 X H 1054	W 644 X D 728 X H 878
WEIGHT (NETT / GROSS)	80 KG / 95 KG	69 KG / 76 KG
AMPERAGE / STARTING AMPERAGE	6,6 A / 35 A	5,3 A / 38 A
ELECTRICAL CONSUMPTION	1320 W	950 W
REFRIGERANT CHARGE	R404a	
HEAT REJECTION (AT32°C / WT21°C)	2870 W (2470 kcal/h)	2250 W (1970 kcal/h)
ICE PRODUCTION PER 24H (15MM)	(AT10°C/ WT10°C) 240 KG (AT21°C/ WT15°C) 220 KG (AT32°C/ WT21°C) 190 KG	220 KG 200 KG 175 KG
WATER CONSUMPTION PER24H	0,36 M3 1.5L/ 1KG ICE	0,31 M3 1.7L/ 1KG ICE
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME 20 MIN PER CYCLE 3,2 KG / 140 PCS	23 MIN 3,2 KG / 140 PCS
MODE	AVAILABLE ALSO IN WATER COOLED MODELS	





Ø 45 mm


BALL



IM-65NE-Q



**IM-55M-2-LM
LM-550M-1**



LARGE CUBE

MODEL NAME	IM-65NE-Q	IM-55M-2-LM	LM-550M-1
SHAPE ICE	BALL APPROX 45 MM	BIG ICE CUBE	
ICE DIMENSION (MM)	48X 48X 58		
DIMENSION (MM)	W 633 X D 506 X H 860	W 630 X D 525 X H 850	W 700 X D 525 X H 1200
PACKED DIMENSION (MM)	W 735 X D 570 X H 1012	W 748 X D 629 X H 915	W 795 X D 625 X H 1310
WEIGHT (NETT / GROSS)	53 KG/ 66 KG	48 KG/ 52 KG	73 KG/ 79 KG
AMPERAGE / STARTING AMPERAGE	2.9A/ 17A	1.6A/ 12A	2.5A/ 17A
ELECTRICAL CONSUMPTION	390 W	265 W	435 W
REFRIGERANT CHARGE	R134a/200g	R134a/240g	R404a/190g
HEAT REJECTION (AT32°C / WT21°C)	800 W/ 690kcal/h	690 W	1300 W
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	26 KG	
	(AT21°C/WT15°C)	24 KG	32 KG
	(AT32°C/WT21°C)	20 KG	28 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0.72 M3	0.14 M3	0.28 M3
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME		
	PER CYCLE	0.67 KG/15 PCS	1.48 KG/ 12 PCS
STORAGE CAPACITY	17 KG		41 KG

FLAKE & NUGGET SELF CONTAINED



FLAKE



NUGGET




FM-150KE
FM-150KE-N

MODEL NAME	FM-150KE	FM-150KE-N	
ICE SHAPE	FLAKE	NUGGET	
DIMENSION (MM)	Body: W 640 X D 600 X H 800/ Leg Height: D89- H-129		
PACKED DIMENSION (MM)	W 746 X D 706 X H 887		
WEIGHT (NETT / GROSS)	71 KG / 82 KG		
AMPERAGE / STARTING AMPERAGE	5.0 A / 20 A		
ELECTRICAL CONSUMPTION	640 W		
REFRIGERANT CHARGE	R134a/220g		
HEAT REJECTION (AT32°C / WT21°C)	1120 W (963 kcal/h)	1120 W (963 kcal/h)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	150 KG	140 KG
	(AT21°C/WT15°C)	130 KG	120 KG
	(AT32°C/WT21°C)	110 KG	100 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0.130 M3	0.120 M3	
STORAGE CAPACITY	26 KG	32 KG	



FLAKE



NUGGET



FM-300AKE
FM-300AKE-N
with HOSHIZAKI
storage bin B-301 SA



FM-480AKE **FM-600AKE**
FM-480AKE-N **FM-600AKE-N**
with HOSHIZAKI storage bin B-301 SA

MODEL NAME	FM-300AKE	FM-300AKE-N	FM-480AKE	FM-480AKE-N	FM-600AKE	FM-600AKE-N	
ICE SHAPE	FLAKE	NUGGET	FLAKE	NUGGET	FLAKE	NUGGET	
DIMENSION (MM)	W 560 X D 700 X H 780						
PACKED DIMENSION (MM)	W 665 X D 820 X H 950						
WEIGHT (NETT / GROSS)	80 KG / 87 KG		95 KG / 102 KG		107 KG / 114 KG		
AMPERAGE / STARTING AMPERAGE	5.8 A / 19 A	5.7 A / 19 A	8.4 A / 43 A		10.5 A / 76 A	10.8 A / 76 A	
ELECTRICAL CONSUMPTION	1000 W		1650 W		1900 W	1950 W	
REFRIGERANT CHARGE	R404a						
HEAT REJECTION (AT32°C / WT21°C)	2200W (1891 KCAL/H)		3320W (2854 KCAL/H)		3950W (3396 KCAL/H)	3700W (3396 KCAL/H)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/ WT10°C)	320 KG	270 KG	500 KG	430 KG	600 KG	530 KG
	(AT21°C/ WT15°C)	260 KG	225 KG	425 KG	360 KG	540 KG	460 KG
	(AT32°C/ WT21°C)	200 KG	180 KG	325 KG	290 KG	445 KG	400 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0.29 M3	0.255 M3	0.455 M3	0.39 M3	0.57 M3	0.49 M3	
	1.1L/1 KG ICE			1L/1 KG ICE			

FLAKE & NUGGET MODULAR



FLAKE



NUGGET




FM-750AKE
FM-750AKE-N
with HOSHIZAKI
storage bin B-501 SA



FM-1000AKE
FM-1000AKE-N
with HOSHIZAKI
storage bin B-501 SA

MODEL NAME	FM-750AKE	FM-750AKE-N	FM-1000AKE	FM-1000AKE-N	
ICE SHAPE	FLAKE	NUGGET	FLAKE	NUGGET	
DIMENSION (MM)	W 762 X D 700 X H 780				
PACKED DIMENSION (MM)	W 873 X D 820 X H 947				
WEIGHT (NETT / GROSS)	133 KG / 143 KG		146 KG / 156 KG		
AMPERAGE / STARTING AMPERAGE	9.2 A / 43 A	9.7 A / 43 A	12.3 A / 76 A	12.5 A / 76 A	
ELECTRICAL CONSUMPTION	1880 W	2010 W	2490 W	2550 W	
REFRIGERANT CHARGE	R404a				
HEAT REJECTION (AT32°C / WT21°C)	3650W (3138 kcal/h)		4470W (3843 kcal/h)		
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	750 KG	590 KG	1030 KG	860 KG
	(AT21°C/WT15°C)	650 KG	500 KG	890 KG	730 KG
	(AT32°C/WT21°C)	530 KG	390 KG	740 KG	590 KG
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0.68 M ³		0.9 M ³	0.74 M ³	
	1L / 1KG ICE			N/A	



DCM-60KE
DCM-120KE

MODEL NAME	DCM-60KE	DCM-120KE	
ICE SHAPE	NUGGET (Compressed Flake Ice)	NUGGET (Compressed Flake Ice)	
DIMENSION (MM)	W 350 X D 585 X H 695 (-710)	W 350 X D 585 x H830	
PACKED DIMENSION (MM)	W 440 X D 655 X H 906	W 440 X D 655 X H 1026	
WEIGHT (NETT / GROSS)	47 KG / 56 KG	57 KG / 66 KG	
AMPERAGE / STARTING AMPERAGE	1.5 A / 5.7A	2.8.A / 12.6A	
ELECTRICAL CONSUMPTION	320 W	480 W	
REFRIGERANT CHARGE	R134A	R134A	
HEAT REJECTION (AT32°C / WT21°C)	460 W (396 kcal/h)	980 W (396 kcal/h)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	60 KG	125KG
	(AT21°C/WT15°C)	50 KG	105 KG
	(AT32°C/WT21°C)	38 KG	85 KG
ICE DISPENSING RATE (40G / CUP)	(AT10°C/WT10°C)	APPROX: 78 CUPS / 30 MIN	APPROX: 165 CUPS / 30 MIN
	(AT21°C/WT15°C)	APPROX: 73 CUPS / 30 MIN	APPROX: 154 CUPS / 30 MIN
	(AT32°C/WT21°C)	APPROX: 67 CUPS / 30 MIN	APPROX: 144 CUPS / 30 MIN
WATER CONSUMPTION PER24H (AT21°C/WT15°C)	0.05M3	0.105M3	
	1L / 1 KG ice	1L / 1 KG ice	
STORAGE CAPACITY	1.9 KG	4.0 KG	

STORAGE BIN



B-301SA




B-501SA



B-801SA

DIMENSION

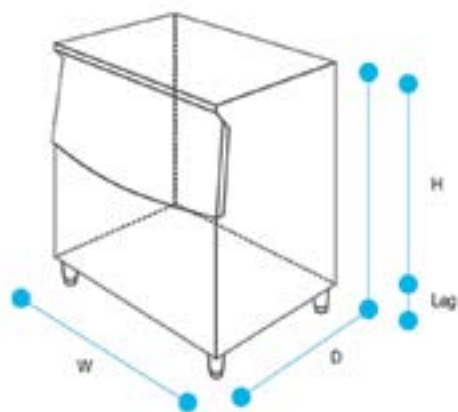

Ice Machine	FM-201 FM-421 FM-600 FM-240A	KMP-11E KM-650 KMD-201 KMD-370		FM-421s2 FM-600s2 M-240A2	KMD201s2 KMD370s2	KM-1301
B-301SA						
Top Kit	No Top Kit					
B-501SA						
Top Kit	1SD		No Top Kit			
B-801SA						
Top Kit	1SD+1SD		1SD	4DU	4DU+4DU	No Top Kit
						1MD

MODEL NAME	B-301SA	B-501SA	B-801SA
STORAGE CAPACITY	APPROX : 118KG / MAX 144KG	APPROX : 173KG / MAX 217KG	APPROX : 286KG / MAX 348KG
OUTSIDE DIMENSION (MM)	W 558.8 X D 820 X H1016	W 762 X D 820 X H1016	W 1219.2 X D 820 X H1016
DOOR STYLE	Upward Opening	Upward Opening	Upward Opening
INSULATION	Polyurethane Foam	Polyurethane Foam	Polyurethane Foam
ACCESSORIES	Scoop, Leg (4 pcs)	Scoop, Leg (4 pcs)	Scoop, Leg (4 pcs)
WEIGHT (NET / GROSS)	37KG / 49KG	47KG / 57KG	64KG / 86KG

CHILLERS & FREEZERS



As our mission and plan to achieve and maintain optimum your satisfaction, we proudly introduce our technology based on years of researching and innovating for better quality of Chillers and Freezers: A-Fit Technology.



UPRIGHT CHILLER DEPTH 650 MM & 800MM



650: HR-76MA-S
800: HR-78MA-S



650: HR-126MA-S
800: HR-128MA-S



650: HR-146MA-S
800: HR-148MA-S



650: HR-186MA-S
800: HR-188MA-S

650 MM

MODEL NAME	HR-76MA-S	HR-126MA-S	HR-146MA-S	HR-186MA-S
ELECTRICAL CONSUMPTION	237 W	343 W	343 W	430 W
STORAGE CAPACITY	467 L	866 L	1021 L	1342 L
EXTERNAL DIMENSION (MM)	W:700 D:650 H:2050	W:1200 D:650 H:2050	W:1400 D:650 H:2050	W 1800 D 650 H 2050
NET WEIGHT	104 Kg	145 Kg	163 Kg	188 Kg

800 MM

MODEL NAME	HR-78MA-S	HR-128MA-S	HR-148MA-S	HR-188MA-S
ELECTRICAL CONSUMPTION	238 W	333 W	367 W	413 W
STORAGE CAPACITY	569 L	1053 L	1243 L	1632 L
EXTERNAL DIMENSION (MM)	W:700 D:800 H:2050	W:1200 D:800 H:2050	W:1400 D:800 H:2050	W:1800 D:800 H:2050
NET WEIGHT	104 Kg	150 Kg	157 Kg	193 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -6°C to 12°C

FREEZER TEMPERATURE CONTROL : -23°C to -7°C



UPRIGHT FREEZER DEPTH 650 MM & 800 MM



650: HF-76MA-S
800: HF-78MA-S



650: HF-126MA-S
800: HF-128MA-S



650: HF-146MA-S
800: HF-148MA-S



650: HF-186MA-S
800: HF-188MA-S

650 MM

MODEL NAME	HF-76MA-S	HF-126MA-S	HF-146MA-S	HF-186MA-S
ELECTRICAL CONSUMPTION	419 W	696 W	696 W	788 W
STORAGE CAPACITY	467 L	856 L	1011 L	1332 L
EXTERNAL DIMENSION (MM)	W:700 D:650 H:2050	W:1200 D:650 H:2050	W:1400 D:650 H:2050	W:1800 D:650 H:2050
NET WEIGHT	106 Kg	150 Kg	168 Kg	200 Kg

800 MM

MODEL NAME	HF-78MA-S	HF-128MA-S	HF-148MA-S	HF-188MA-S
ELECTRICAL CONSUMPTION	469 W	700 W	740 W	917 W
STORAGE CAPACITY	569 L	1047 L	1233 L	1622 L
EXTERNAL DIMENSION (MM)	W:700 D:800 H:2050	W:1200 D:800 H:2050	W:1400 D:800 H:2050	W:1800 D:800 H: 2050
NET WEIGHT	109 Kg	152 Kg	163 Kg	198 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -6°C to 12°C

FREEZER TEMPERATURE CONTROL : -23°C to -7°C



GLASS DOOR UPRIGHT CHILLER DEPTH 800 MM



HR-78MA-SG



HR-128MA-SG



HR-148MA-SG



HR-188MA-SG


MODEL NAME	HR-78MA-SG	HR-128MA-SG	HR-148MA-SG	HR-188MA-SG
ELECTRICAL CONSUMPTION	306 W	343 W	367 W	568 W
STORAGE CAPACITY	600 L	1110 L	1243 L	1720 L
EXTERNAL DIMENSION (MM)	W:700 D:800 H:2050	W:1200 D:800 H:2050	W:1400 D:800 H:2050	W:1800 D:800 H:2050
NET WEIGHT	108 Kg	157 Kg	167 Kg	206 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz


CHILLER TEMPERATURE CONTROL : -2°C to 12°C




UPRIGHT COMBO DEPTH 800 MM

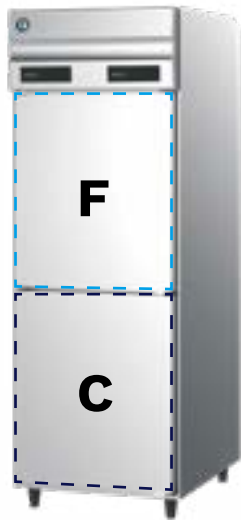


HRF-78MA-S

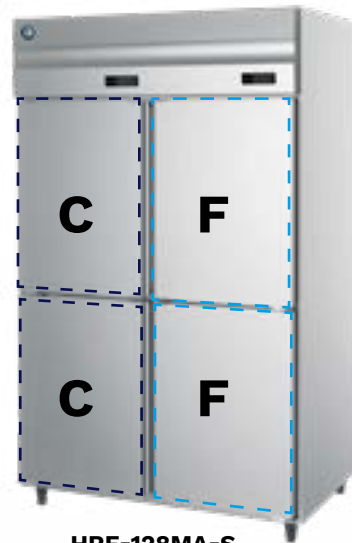

HRF-128MA-S

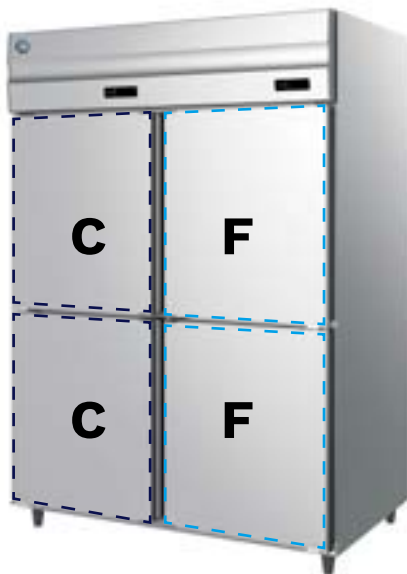

HRF-148MA-S

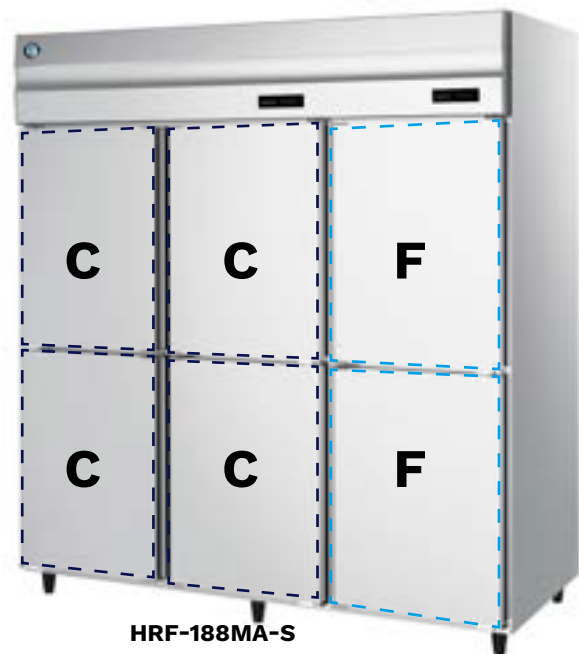

HRF-188MA-S

MODEL NAME	HRF-78MA-S	HRF-128MA-S	HRF-148MA-S	HRF-188MA-S
ELECTRICAL CONSUMPTION	478 W	704 W	808 W	752 W
STORAGE CAPACITY	540 L	862 L	1054 L	1523 L
	Chiller: 260 L	Chiller: 431 L	Chiller: 527 L	Chiller: 1025 L
	Freezer: 280 L	Freezer: 431 L	Freezer: 527 L	Freezer: 498 L
EXTERNAL DIMENSION (MM)	W:700 D:800 H:2050	W:1200 D:800 H:2050	W:1400 D:800 H:2050	W:1800 D:800 H:2050
HEAT REJECTION	1030 W	* W	* W	1320 W
AMPERAGE	4.8 A	7.7 A	7.7 A	6.5 A
NET WEIGHT	125 Kg	171 Kg	187 Kg	220 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -6°C to 12°C

FREEZER TEMPERATURE CONTROL : -23°C to -7°C



UNDERCOUNTER CHILLER DEPTH 600 MM & 750MM



600: RT-96MA-S
750: RT-98MA-S



600: RT-126MA-S
750: RT-128MA-S



600: RT-156MA-S
750: RT-158MA-S



600: RT-186MA-S
750: RT-188MA-S

600 MM

MODEL NAME	RT-96MA-S	RT-126MA-S	RT-156MA-S	RT-186MA-S
ELECTRICAL CONSUMPTION	220 W	240 W	260 w	270 W
STORAGE CAPACITY	151 L	231 L	318 L	401 L
EXTERNAL DIMENSION (MM)	W:900 D:600 H:850	W:1200 D:600 H:850	W:1500 D:600 H:850	W:1800 D:600 H:850
NET WEIGHT	61 Kg	71 Kg	81 Kg	93 Kg

750 MM

MODEL NAME	RT-98MA-S	RT-128MA-S	RT-158MA-S	RT-188MA-S
ELECTRICAL CONSUMPTION	220 W	240 W	260 w	270 W
STORAGE CAPACITY	199 L	307 L	420 L	502 L
EXTERNAL DIMENSION (MM)	W:900 D:750 H:850	W:1200 D:750 H:850	W:1500 D:750 H:850	W:1800 D:750 H:850
NET WEIGHT	67 Kg	78 Kg	87 Kg	102 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -6°C to 12°C

FREEZER TEMPERATURE CONTROL : -23°C to -7°C



UNDERCOUNTER FREEZER DEPTH 600 MM & 750 MM



750: FT-128MA-S



600: FT-165MA-S
750: FT-158MA-S



600: FT-186MA-S
750: FT-188MA-S

600 MM

MODEL NAME	FT-156MA-S	FT-186MA-S
ELECTRICAL CONSUMPTION	415 W	400 W
STORAGE CAPACITY	318 L	401 L
EXTERNAL DIMENSION (MM)	W:1500 D 600 H 850	W:1800 D:600 H:850
NET WEIGHT	81 Kg	93 Kg

750 MM

MODEL NAME	FT-128MA-S	FT-158MA-S	FT-188MA-S
ELECTRICAL CONSUMPTION	418 W	415 W	400 W
STORAGE CAPACITY	307 L	420 L	502 L
EXTERNAL DIMENSION (MM)	W:1200 D:750 H:850	W:1500 D:750 H:850	W:1800 D:750 H:850
NET WEIGHT	79 Kg	89 Kg	102 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -6°C to 12°C

FREEZER TEMPERATURE CONTROL : -23°C to -7°C



SWING GLASS UNDERCOUNTER CHILLER DEPTH 600 MM & 750



600: RT-96MA-SG
800: RT-98MA-SG



600: RT-126MA-SG
800: RT-128MA-SG



600: RT-156MA-SG
800: RT-158MA-SG



600: RT-186MA-SG
800: RT-188MA-SG

600 MM

MODEL NAME	RT-96MA-SG	RT-126MA-SG	RT-156MA-SG	RT-186MA-SG
ELECTRICAL CONSUMPTION	195 W	215 W	235 W	245 W
STORAGE CAPACITY	151 L	231 L	318 L	401 L
EXTERNAL DIMENSION (MM)	W:900 D:600 H:850	W:1200 D:600 H:850	W:1500 D:600 H:850	W:1800 D:600 H:850
NET WEIGHT	62 kg	82 Kg	98 Kg	115 kg

750 MM

MODEL NAME	RT-98MA-SG	RT-128MA-SG	RT-158MA-SG	RT-188MA-SG
ELECTRICAL CONSUMPTION	195 W	215 W	235 W	245 W
STORAGE CAPACITY	199 L	307 L	420 L	502 L
EXTERNAL DIMENSION (MM)	W:900 D:750 H:850	W:1200 D:750 H:850	W:1500 D:750 H:850	W:1800 D:750 H:850
NET WEIGHT	67 Kg	88 Kg	105 Kg	123 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -2°C to 12°C



SLIDE GLASS UNDERCOUNTER CHILLER DEPTH 600 MM



RT-126MA-SSG



RT-156MA-SSG



RT-186MA-SSG

MODEL NAME	RT-126MA-SSG	RT-156MA-SSG	RT-186MA-SSG
ELECTRICAL CONSUMPTION	238 W	258 W	248 W
STORAGE CAPACITY	231 L	318 L	401 L
EXTERNAL DIMENSION (MM)	W:1200 D:600 H:850	W:1500 D:600 H:850	W:1800 D:600 H:850
NET WEIGHT	82 Kg	98 Kg	115 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -2°C to 12°C

LOWER HEIGHT DRAWER CHILLER



RTL-148MA-SD



RTL-188MA-SD

MODEL NAME	RTL-148MA-SD	RTL-188MA-SD
ELECTRICAL CONSUMPTION	225W	225W
STORAGE CAPACITY	176 L	267 L
EXTERNAL DIMENSION (MM)	W:1400 D:750 H:570	W:1820 D:750 H:570
NET WEIGHT	95 Kg	120 Kg

POWER SUPPLY : 1 Phase 220V - 240V 50Hz

CHILLER TEMPERATURE CONTROL : -6°C to 12°C

FREEZER TEMPERATURE CONTROL : -23°C to -7°C



DRAWER CHILLER



RTC-90DDA-GN-2D



RTC-125DDA-GN-4D



RTC-167DDA-GN-6D



RTC-90DDA-GN-3D



RTC-125DDA-GN-6D



RTC-167DDA-GN-9D

MODEL NAME	RTC-90DDA-GN-2D	RTC-90DDA-GN-3D	RTC-125DDA-GN-4D	RTC-125DDA-GN-6D	RTC-167DDA-GN-6D	RTC-167DDA-GN-9D
ELECTRICAL CONSUMPTION						* W
STORAGE CAPACITY	176 L	176 L	296 L	296 L	443 L	443 L
EXTERNAL DIMENSION (MM)	W:900 D:750 H:800	W:900 D:750 H:800	W:1250 D:750 H:800	W:1250 D:750 H:800	W:1670 D:750 H:800	W:1670 D:750 H:800
NET WEIGHT	82 KG	85 KG	109 Kg	119 Kg	145 Kg	161 Kg

DRAWER FREEZER

MODEL NAME	FTC-167DDA-GN-6D	FTC-167DDA-GN-9D
POWER SUPPLY	1 Phase 220V - 240V 50Hz	1 Phase 220V - 240V 50Hz
ELECTRICAL CONSUMPTION		* W
STORAGE CAPACITY	443 L	443 L
EXTERNAL DIMENSION (MM)	W:1670 D:750 H:800	W:1670 D:750 H:800
NET WEIGHT	143 Kg	169 Kg



FTC-167DDA-GN-6D



FTC-167DDA-GN-9D

POWER SUPPLY	: 1 Phase 220V - 240V 50Hz
CHILLER TEMPERATURE CONTROL	: -6°C to 12°C
FREEZER TEMPERATURE CONTROL	: -23°C to -7°C



DISHWASHER



Hoshizaki introduces the high performance and low energy consumption dishwashing solution for your busy kitchen. Simple and compact in size, our dishwasher is designed to take the load off your operations with an easy to operate unit for small to medium size establishments.



DISHWASHER

HW-320B



HW-600B3



PRODUCT SERIES	UNDERCOUNTER TYPE DISHWASHER	HOOD TYPE DISHWASHER
MODEL NAME	HW-320B	HW-600B3
POWER SUPPLY	1ph / 220 - 240 V / 50Hz	3/380-415V/50Hz
ELECTRIC CONSUMPTION	5.0 - 5.8 kW	9.7 - 11.5 kW
HEAT POWER (WASHING)	1.8 - 2.2kW	1.8 - 2.2 kW
HEAT POWER (RINSING)	4.4 - 5.2kW	9.0 - 10.8 kW
RACK DIMENSIONS	500 x 500 mm	500 x 500 mm
NUMBER OF PROGRAMS	5	5
WASHING CAPACITY (RACK / HOUR)	35 / 27 / 23 / 20 /18	69/35/27/23/18
WASHING WATER TEMP.	55 - 60 °C	55 - 60 °C
RINSING WATER TEMP.	80 - 85 °C	80 - 85 °C
WATER CONSUMPTION	2.3 L	2.3 L
WASHING/BOILER TANK CAPACITY	12L/ 7L	22L/ 7L
MAX NOISE	65 dBA	67 dBA
LOADING HEIGHT	390 mm	445 mm
OUTSIDE DIMENSIONS/ WEIGHT	600 (W) x 655 (D) x 830 (H) mm / 70kg	707 (W) x 795 (D) x 1485 (H) mm / 110 kg
PACKAGE DIMENSIONS / WEIGHT	700 (W) x 750 (D) x 1000 (H) mm / 120kg	725 (W) x 795 (D) x 1638 (H) mm / 120 kg
WATER INLET CONNECTION	3/4	3/4
WATER INLET PRESSURE/ TEMPT	2-4 Bar/ max 50 °C	2-4 Bar/ max 50 °C
DRAIN WATER DISCHARGE CONNECTION	3/ 4 Ø 28 mm	3/ 4 Ø 28 mm
ACCESSORIES PACKAGE	<ul style="list-style-type: none"> • Electrical Connection Cable • Flexible Water Supply & Drain Hose • 2 Racks (Plate & Glass) • Detergent & Rinse Aid Dispenser • Drain Pump" 	<ul style="list-style-type: none"> • Electrical Connection Cable • Flexible Water Supply & Drain Hose • 3 Racks (Plate, Glass & Cutlery) • Detergent & Rinse Aid Dispenser • Drain Pump"

*Single Phase is also available for Hood Type Dishwasher



SUSHI SHOWCASE



Refrigerated sushi cases functions to ensure the freshness of produce and as a point of attraction when placed on the sushi counter. Hoshizaki's sushi cases are designed with curved glass provide an aesthetic edge while its powerful cooling performance with stable humidity and temperature control keeps sushi fresh without drying it out. Left or right option refrigerant panel ensure flexibility of placement on the counter.



SUSHI SHOWCASE



LEFT MACHINE



RIGHT MACHINE

MODEL NAME	HNC-120BE	HNC-150BE	HNC-180BE	HNC-210BE
AMPERAGE			1.2A	
STARTING AMPERAGE			6A	
SATURATAION TEMPERATURE		Approx 4°C (AMBIENT TEMPERATURE 27°C)		
PULL DOWN TIME		Approx 30 Min (30°C>10°C)		
REFRIGERANT CHARGE	R134a/ 80g	R134a/ 110g	R134a/ 140g	R134a/ 190g
OUTSIDE DIMENSIONS (MM)	W 1200 D 345 H 270	W 1500 D 345 H 270	W 1800 D 345 H 270	W 2100 D 345 H 270
INSIDE DIMENSIONS (MM)	W:845 D:288 H:157	W:1145 D:288 H:157	W:1445 D:288 H:157	W:1745 D:288 H:157
EFFECTIVE CAPACTIY	42 L	57 L	72 L	87 L
DEFROST SYSTEM	N/A			
DOOR (SLIDING GLASS) (MM)	2 (W 435 X H 172)	4 (W 293 X H 172)	4 (W 368 X H 172)	4 (W 443 X H 172)
PACKED DIMENSION (MM)	W:1280 D:415 H:517	W:1580 D:415 H:517	W:1880 D:415 H:517	W:2180 D:415 H:517
WEIGHT (NET/GROSS)	32 Kg/ 44 Kg	37 Kg/ 52 Kg	42 Kg/ 60 Kg	47 Kg/ 68 Kg

OPERATING CONDITIONS:

VOLTAGE RANGE RATED VOLTAGE	: ±6%
AMBIENT TEMPERATURE:	: 5°C to 38°C
AC SUPPLY VOLTAGE:	: 1/220-240V/ 50 Hz
SUSHI CASE TEMPERATURE CONTROL:	: 5°C

*Sushi Showcase available in right & left machines



Your Satisfaction is
Always Our Priority

CHILLERS, FREEZERS, ICE MACHINES & DISHWASHER



- 2 years warranty parts and compressor for Chillers & Freezers
- Excluding door, glass & exterior damages.

- 2 years warranty parts for Ice Machines
- 3 years warranty on compressor only
- Excluding door & exterior damages.

- 1 years warranty parts for Dishwasher
- Excluding door & exterior damages.

The Pleasure is Ours
to See You Here



Our Service Networks:

- | | |
|---------------|-----------------|
| 1. Jakarta | 10. Palembang |
| 2. Bali | 11. Pekanbaru |
| 3. Surabaya | 12. Batam |
| 4. Medan | 13. Bandung |
| 5. Makassar | 14. Balikpapan |
| 6. Manado | 15. Banjarmasin |
| 7. Semarang | 16. Lampung |
| 8. Solo | 17. Padang |
| 9. Yogyakarta | 18. Samarinda |

MORE SERVICE NETWORK TO COME YOUR CITIES



CV KARYA MUDAH SEJAHTERA



+62 818-0732-8340



a.saeroji@yamura.id



Jl. Glogor Carik No 9A, Denpasar, Bali