


HOOD TYPE DISHWASHER

HW-600B3



WASHING

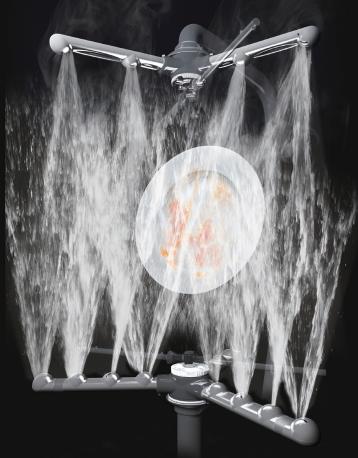

POWERFUL WASHING

Japan designed original triple arm nozzles enable three washing per rotation and clean up every corner powerfully and perfectly.

ENVIRONMENTALLY FRIENDLY


Japan designed original rinsing nozzles reduce the water consumption and enable wash away detergent thoroughly with less water consumption.





EASY TO USE TOUCH PANEL

User friendly touch control panel follows washing steps easily with colored and dynamic graphics. Detregent / Rinse aid time is adjustable from touch control panel.

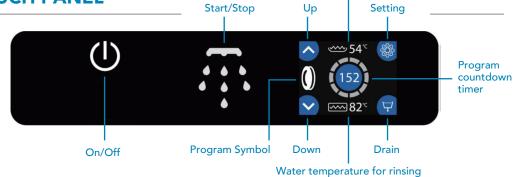


Water temperature for washing

HYGIENIC DESIGN


Stainless steel and seamless integral construction washing tank with round corners keeps the machine clean and hygienic.



Designed by Hoshizaki Japan, the slanted ceiling ensures perfect cleaning result and hygiene by preventing water drops after washing.



HOOD TYPE DISHWASHER HW-600B3

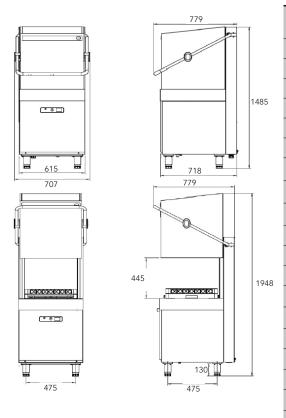

Code	071T.1111AH.AB
Mode Name	HW-600B3 PDRT
Power Supply	3ph / 380 - 415 V / 50Hz
Electric Consumption	9.7 - 11.5kW
Washing Heat Power	1.8 - 2.2kW
Rinsing Heat Power	9.0 - 10.8kW
Rack Dimensions	500 x 500mm
Number of programmes	5
Washing Capacity (Rack / Hour)	69 / 35 / 27 / 23 / 18
Washing Water Temp.	55 - 60°C
Rinsing Water Temp.	80 - 85°C
Water Consumption	2.3L
Washing / Boiler Tank Capacity	22L / 7L
Max. Noise	67 dBA
Loading height	445 mm
Outside Dimensions / Weight	707(W) x 779(D) x 1485(H)mm / 110kg
Package / Weight	725(W) x 795(D) x 1638(H)mm / 120kg
Water Inlet Connection	3/4
Water inlet pressure / Temp.	2 - 4 Bar / max 50°C
Drain water discharge connection	3 / 4 (Ø28 mm)
Accessories	 Electrical Connection Cable Flexible Water Supply and Drain Hose 3 Racks (Plate, Glass and Cutlery) Detergent & Rinse Aid Dispenser Drain Pump

%Single phase is also availble









